# **D-2200**







#### Introduction

D-2200 series is designed for simple conference room, it is a highly stable conference with easy operation.

## Main Features

- Up to 100 units can be connected to one system, maximum 12 chairman units. It can be expanded to 250 units with expanding device
- Meeting Mode: FIFO/ LIFO, Chairman Mode, All On
- Unit voice activation
- Compatible with central controller via RS-232
- Unit hot-plug connection available

## Features of Microphone Unit

- Hyper-cardioid directional condenser capsule
- 60cm voice pick-up distance
- Anti-interference from cellphone
- Detachable design
- With earphone output



Specification	
Power Supply:	AC110V-240V
Max. Current Consumption:	1A
Frequency Response:	50Hz-20KHz
SNR:	> 85dBA
Distortion:	< 0.05%
Dimension:	483x323x90 mm
Weight:	5.5kg
Color:	Black

## D-2200M



Specification	
Power Supply:	DC24V
Max. Current Consumption:	40mA
Sensitivity:	-46dB/Pa
Frequency Response:	100Hz-12KHz
SNR:	>75dB
Distortion	<0.1%
Dimension:	170x115x44mm; Mic Tube: 420mm
Weight:	0.85kg
Color:	Black

## D-2220C/D



Specification	
Power Supply:	DC24V
Max. Current Consumption:	40mA
Sensitivity:	-46dB/Pa
Frequency Response:	100Hz-12KHz
SNR:	>75dB
Distortion	<0.1%
Dimension:	268x44x127mm; Mic Tube: 420mm
Weight:	0.85kg
Color:	Silver/Black

## D-2210C/D




Specification	
Power Supply:	DC24V
Max. Current Consumption:	60mA
Sensitivity:	-50dB/Pa
Frequency Response:	100Hz-12KHz
SNR:	>75dB
Distortion	<0.1%
Dimension:	167x105x48mm; Mic Tube: 420mm
Weight:	1.15kg
Color:	Silver/Black

## D-2200M Rear Panel



- [1]. Power Socket
- [2]. 6.3mm Earphone Jack
- [3]. 6.3mm Audio Input
- [4]. XLR Output
- [5]. Aux RCA Jacks
- [6]. RS-232 Port for Central Controller [7]. RS-232 Port for PC
- [8]. Microphone Unit Port

## **D-2200M System Connection**

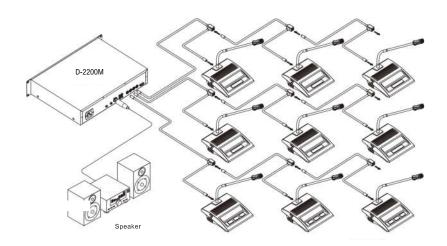

# \*Wired Conference System Comparison Chart

Item Model	D-5500M	D-5630M	D-5620M	D-2300M	D-2200M
Interpretation	•				
Wired Voting	•	•			
Wireless Voting		•			
Sign-in	•	•			
Camera Tracking	•	•	•	•	
Discussion	•	•	•	•	•
Chairman QTY	20	12	12	12	12
Max Unit QTY	100	100	100	100	100
Speaking QTY	8	All On	All On	All On	All On
Display	LCD	Touch Screen	Touch Screen	LCD	LCD
Languages	●English ∘Chinese ∘Other	•English ∘Chinese ∘Other	●English ∘Chinese ∘Other	●English ∘Chinese ∘Other	●English ∘Chinese ∘Other
Network Control		•	•		
USB Recording		•	•	•	•
Connection	13Pins (GS-61)	8Pins (GS-64)	8Pins (GS-64)	8Pins (GS-64)	8Pins (GS-64)
XLR Output	•	•	•	•	•
RCA 6.3 Output				•	•
Aux. Input/Output	•	•	•	•	•
Aviation Plug		•	•	•	•
Color	Black	Black	Black	Black	Black
19" Rack Installation	•	•	•	•	•

Microphone Unit	D-5500C/D	D-5501C/D	D5630C/D	D-5631C/D	D5650C/D	D-5621C/D	D-5622C/D	D-2330C/D	D-2320C/D	D-2310C/D	D-2230C/D	D-2220C/D	D-2210C/D
Chairman Priority	•	•	•	•	•	•	•	•	•	•	•	•	•
FIFO	•	•	•	•	•	•	•	•	•	•	•	•	•
LIFO	•	•	•	•	•	•	•	•	•	•	•	•	•
Voice Control	•	•	•	•	•	•	•	•	•	•	•	•	•
Time Off	•	•	•	•	•	•	•	•	•	•	•	•	•
Detachable Capsule	•	•	•	•	•	•	•	•	•	•	•	•	•
Detachable Base	•	•	•	•	•	•	•	•	•	•	•	•	•
Loudspeaker	•		•		•		•	•			•		
Earphone Jack(3.5)	•	•	•	•	•	•	•	•	•	•	•	•	•
Display	•	•	•	•	•	•			•	•			
Languages	●English ∘Chinese ∘Other	•English •Chinese •Other	•English •Chinese •Other	•English •Chinese •Other	•English •Chinese •Other	●English ∘Chinese ∘Other	•English •Chinese •Other	●English ∘Chinese ∘Other	•English •Chinese •Other	•English •Chinese •Other	•English •Chinese •Other	•English •Chinese •Other	•English •Chinese •Other
L. of Mic Tube	●420mm ◎350mm	●420mm ○350mm	●420mm ○350mm	●420mm ∘350mm	●420mm ○350mm	•420mm ∘350mm	●420mm □350mm	●420mm ○350mm	●420mm ∘350mm	●420mm ∘350mm	●420mm ○350mm	●420mm ∘350mm	●420mm ◎350mm
Red Ring Indicator	•	•	•	•	•	•	•	•	•	•	•	•	•
Installation	Desktop	Embedded	Desktop	Embedded	Desktop	Embedded	Desktop	Desktop	Desktop	Embedded	Desktop	Desktop	Embedded
Material	Metal	Plastic	Metal	Metal	Plastic	Metal							
Color	Black Silver	●Black	Black Silver	Black Silver	• Black	Black Silver							

## **External Device**

Central Controller	•	•	•	•	•
Video Switch	•	•	•	•	
Anti-howling	•	•	•	•	•
Telephone Coupler	•	•	•	•	•