

Team Collaboration

Team collaboration happens everywhere today. With room to grow at any time, our ideal team collaboration solutions help foster and improve team work for small, medium and large-sized conferencing. Seeing and being seen, sharing ideas, and hearing others clearly bridges the distances between physical locations – even across the world. Everyone feels more connected and involved with teams and projects when Hikvision boosts their audio & video conferencing.



Small & medium-sized conferencing

Audio and video devices: All-in-One A/V Pillar, or Sound Cube Speakerphone and Camera Bar are recommended. Enjoy 1080p or better video quality, 3- to 5-meter pick-up distance, and sound amplification.

Display devices: Interactive Flat Panel & Monitor.

Video Conference Host: 65" Interactive Flat Panel display and laptop.

Video Software: Zoom, Webex, Tencent Meeting, WeChat, DingTalk, and more.



Medium & large-sized conferencing

Audio and video devices: All-in-One A/V Pillar, or Sound Cube Speakerphone and Camera Bar are recommended. Enjoy 1080p or better video quality, 3- to 5-meter pick-up distance, and sound amplification.

Display devices: Interactive Flat Panel & Monitor.

Video Conference Host: 65" Interactive Flat Panel display and laptop.

 $\begin{tabular}{ll} \textbf{Video Software:} Zoom, Webex, Tencent Meeting, WeChat, DingTalk, and more. \\ \end{tabular}$

3 4



Small & Medium-sized

Conferencing

Portable audio and video conferencing solution

This solution includes a light-weight, portable, and all-in-one Audio/Video Pillar unit. It's great for office conference rooms or starting a remote meeting anywhere you need. With audio and video functionalities in one device, it's easy to use and great for high-quality communication.



All-in-One Pillar X12

- Compact, all in one design with integrated camera, 4 microphones, and speaker to quickly start a meeting in huddle space
- 1080p HD video imaging
- 120° Wide-angle viewing without distortion
- Easily adjust viewing angle and volume by remote control
- Easy to set up with simple cable connections
- Portable design to help you get into meetings anytime, anywhere





Small & Medium-sized

Conferencing

Ultra-HD audio and video conferencing solution

Combining our Camera Bar and Sound Cube Speakerphone, Hikvision provides an enjoyable communication experience for teams in small- to medium-sized conference rooms. Your meeting will be much more productive and interactive with ultra-HD imaging and crisp, clear audio, ensuring more interaction with virtually face-to face collaboration.



Conference Webcam UC8

- Premium 4K video imaging
- Auto focus targets objects quickly
- Easy setup with simple cable connections



Sound Cube Speakerphone S1

- Designed with microphones and speakers set at key angles
- Accurate voice reception with Al noise reduction and clear audio





Interactive Flat Panel D5B 65"





Medium & Large-sized

Conferencing

01

Smart, ultra-HD audio & video conferencing solution

Need to upgrade your conferencing equipment simply and affordably? Hikvision can help! Our world-class, All-in-One A/V Camera Bar gives you 4K UHD imaging with a wide-angle view, and clear voice pick up and playback even for large groups. The smart auto-framing and speaker tracking always puts you in the best position. It's remarkably simple to use, manage, and integrate with its sleek design.

Interactive Flat Panel D5B 75"



All-in-One Camera Bar X28

- All in one design with integrated camera, 8 microphones, and speaker to quickly start a meeting
- 4K ultra-high definition, 118° wideangle viewing without distortion
- Clear voice collection with intelligent noise reduction, loud & clear voice transmission
- Smart auto-framing and speaker tracking





HIKVISION

Medium & Large-sized

Conferencing

02

High-definition audio and video conferencing solution for businesses

One plus one is greater than two! Stay at ease and look your best in your meeting when our PTZ Camera zooms in for quick framing with clear visual details. Enjoy natural video reproduction even against strong backlighting. The Sound Cube Speakerphone ensures that everyone in the meeting will be heard clearly while filling larger rooms with rich, realistic sound. How can a business operate without it?



Conference Webcam U102

- Premium video imaging
- 5x optical zoom for clear visual details
- Rapid focus on a speaker via pre-programmed settings
- 120 dB true WDR to deliver crisp video even against strong backlighting



Sound Cube Speakerphone S1

- Designed with microphones and speakers set at key angles
- Accurate voice reception with Al noise reduction and clear audio



Interactive Flat Panel D5B 65"



Product Introduction

Sound Cube Speakerphone

Connect and collaborate easily with Hikvision's Sound Cube speakerphone for remote conferencing and enjoy natural, clear sound all around.

The Sound Cube brings your far-away team members close, anywhere in the world. Everyone's voice and ideas are important – now, they can be heard clearly and completely.



360° voice pick-up & sound amplification

Clear audio and stable sound all around

Al noise reduction

Intelligently filters out background noise







ng Keyboard tapping

Knocking on the table

Echo suppression & anti-reverberation

- Audio from the sound speaker will not be picked up by microphones
- Reducing the sound reverberation caused by hard surfaces (walls, ceilings, tables, etc.).





Howling sound

Audio feedback

Flexible connectivity options for smart devices and PCs








adapter

tooth

USB cable

Easy to adjust volume or mute mic


Controlling your meeting quickly and easily



Portable, compact and lightweight for easy travel

Controlling your meeting quickly and easily



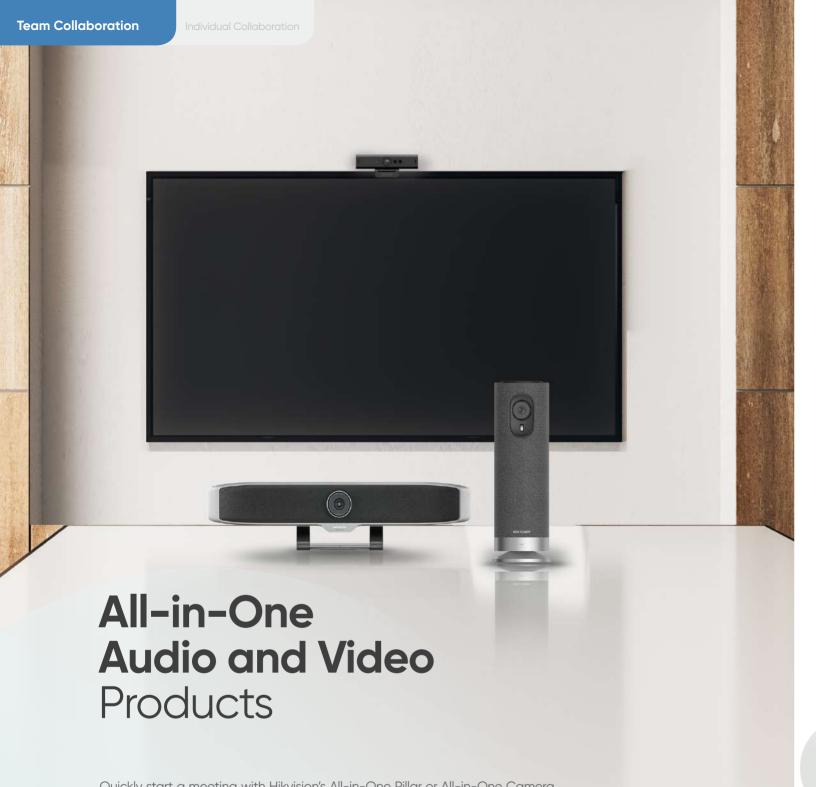

Quickly start a meeting with Hikvision's All-in-One Pillar or All-in-One Camera Bar, and enjoy a powerful audio and video conferencing experience without hassle. With their sleek and all-in-one design, these two products are easy to use, manage and deploy, delivering brilliant imaging and high-performance audio for a more natural and productive meeting.

HIKVISION*

All-in-One Pillar

3 in 1 design

One device to start remote meeting easily









120° super wide-angle without distortion

Greater coverage with one view

Intelligent noise reduction

Filters unwanted ambient noise in the room









Plug and play

No need to install plug-ins





All-in-One Bar




Smart auto framing

All participants always remain in the center of the image, even when someone leaves or joins.



Smart speaker tracking

Automatic focus and tracking the speaker keeps the key person in the center.



15 16





HIKVISION

PTZ Camera

Our industry-leading PTZ Camera delivers sharp, brilliant video imaging with outstanding color even in strong backlighting – and it's designed to fit any professional setting. When set on a table, it fits perfectly in your meeting and quickly zooms in and out to capture any details. Attendees are naturallooking and the smart auto-tracking ensures they always remain in the best position on the screen.

5x Optical zoom

See clearly, near & far. Zoom in to show the meeting material details and all participants clearly.











One click for quick location

Quickly capture the details. The remote control can help configure and trigger preset points, quickly focusing on the speaker at the conference.



120 dB True WDR

Crisp video imaging even in a room with strong backlight. Imaging is natural and clear.





With True WDR

Without True WDR





Product **Showcase**

Sound Cube Speakerphone			DS-UAC-S	\$1 (Wireess model)
Audio	8-microphone array	•		
	Built-in high fidelity speaker	②		
Smart functions	Al noise reduction	②		
	Echo suppression	•		
	Anti-reverberation		•	
Ease of use	Mic mute / volume up / volume down	•		
	Answer & end call		•	
Flexible Connections	Wired connection (USB cable)	Ø		
	Wireless connection (Bluetooth & USB adapter)	⊘		
Accessories	Portable to go	Travel case × 1 USB cable (2 m) × 1 USB adapter × 1 Power adapter × 1	Warranty	2 years

Video Conferenc	ing Products	DS-UC8	DS-UVC-X12	iDS-UVC-X28
Video	High quality imaging	4K	1080p	4K
	Wide-angle without distortion	91°	120°	118°
Audio	Built-in mic array	2-mic	4-mic array	8-mic array
	Built-in high fidelity speaker	0	8m sound amplification	15m sound amplification
	Intelligent noise reduction	O	Ø	•
	Echo suppression & Anti-reverberation	0	②	•
Smart functions	Smart auto framing	0	0	•
	Smart speaker tracking	0	0	•
Remote Control	Bluetooth remote control	•	Ø	•
Installation	Portable to go	Desk/Screen/Tripod mounting	Portable & removable Desk mounting	Desk/Wall mounting
Connection	USB cable, plug and play	•	Ø	•

PTZ Camera	DS-U102 (2MP)	Bracket Remote	Control Cable Adapter	
Lens	3.1 mm to 15.5 mm vari-focal lens, 5x optical zoom	Cable Length	4.5 m	
Auto Focus	•	Video Output	USB 2.0	
WDR	≥ 120 dB	Housing Material	Metal	
FOV	Horizontal: 84.9° to 20.8° Vertical: 92.8° to 23.8° Diagonal: 94° to 23.8°	Packing List	Camera (including lens cover), remote control, power adapter, cable, bracket, screws, quick start guide	
Angle Adjustment	Pan: -170° to 160° Tilt: -28° to 28°			
Audio In	Built-in mic	Warranty	2 years	

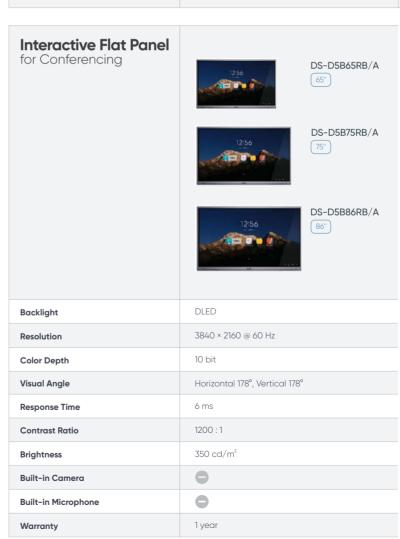





· 1

DS-D5AS5/8S1L

package list by default.

6th-generation Intel® Core i5 7400 3.0 GHz

Note: wall-mounted bracket is included in the interactive display's

- Memory 8 GB, SSD 128 GBIntel Integrated Graphics, support H.265 and
- 4K resolution
- Interfaces: $6 \times \text{USB } 3.0, 1 \times \text{HDMI}, 1 \times \text{DP}$
- Support MSATA system disk quick start
- Standard Intel OPS interface
- Without Windows OS

DS-D5AS5/8S2L

- 8th-generation Intel® Core i5 9400 3.0 GHz
 Memory 8 GB, SSD 256 GB
- Intel Integrated Graphics 500, support H.265 and 4K resolution
- Interfaces: 4 x USB 3.0, 2 x USB2.0, 1 x HDMI, 1 x DP
- Support MSATA system disk quick start
- Built-in Win 10 OS

*Two-year warranty for products above.



HIKVISION CONFERENCE FLAT PANEL

D5B Series

Take your collaborations to a new level

· Built-in Whiteboard

Smooth writing experience with up to 45 points touch control, free annotation and convenient sharing

4K UI Display

4K resolution with zero-gap bonding screen, anti-glared, anti-blocking and fingerprint-resistant.

Central Management

Remotely control multiple devices for efficient operation

Wireless Projection

Brand-new Wondercast software to support flexible projection, reverse control and group display.





Android 11



4GB & 64 GB Built-in Storage



Full-Featured Type-C



Scan to learn more

Product Comparison

Technical Parameters Highlights Differences All Parameters **COMPARE COMPARE Selected Product** DS-D5B86RB/D DS-D5B65RB/D DS-D5B75RB/D 75-inch 4K Interactive Flat 65-inch 4K Interactive Flat 86-inch 4K Interactive Flat **Panel Panel Panel Operation System** Android 11 Android 11 Android 11 **Processor** A72*2 + A53*4, 1.8 GHz A72*2 + A53*4, 1.8 GHz A72*2 + A53*4, 1.8 GHz Memory 4 GB 4 GB 4 GB **Built-In Storage** 64 GB 64 GB 64 GB NIC Built-in 1000 Mbps NIC, supportin Built-in 1000 Mbps NIC, supportin Built-in 1000 Mbps NIC, supportin g routing; IEEE 802.11 a/b/g/n/ac g routing; IEEE 802.11 a/b/g/n/ac g routing; IEEE 802.11 a/b/g/n/ac with 2 × 2 MIMO, supporting both with 2 × 2 MIMO, supporting both with 2 × 2 MIMO, supporting both 2.4 GHz and 5GHz bands 2.4 GHz and 5GHz bands 2.4 GHz and 5GHz bands Pixel 8 MP 8 MP 8 MP **Camera Function** Smart switch between Android sys Smart switch between Android sys Smart switch between Android sys tem and OPS tem and OPS tem and OPS Field Angle 120°(diagonal), 110°(horizontal), 6 120°(diagonal), 110°(horizontal), 6 120°(diagonal), 110°(horizontal), 6 6°(vertical) 6°(vertical) 6°(vertical) Distortion ≤6% ≤6% ≤6% **Camera Resolution Ratio** Up to 4K Up to 4K Up to 4K Screen Size 65 inch LED Backlight 75 inch LED Backlight 86 inch LED Backlight Backlight DLED **DLED DLED Pixel Pitch** $0.124 (H) \times 0.372 (V) mm$ 0.143 (H) \times 0.430 (V) mm $0.164 (H) \times 0.493 (V) mm$ Resolution 3840 × 2160@60 Hz 3840 × 2160 @60 Hz 3840 × 2160@60 Hz Brightness 350 cd/m² 350 cd/m² 350 cd/m² **Color Depth** 10 bit **Contrast Ratio** 4000:1 (Typ.) 4000:1 (Typ.) 4000:1 **Response Time** 6 ms 6 ms 6 ms **Color Gamut** 90% NTSC (CIE1931) (Typ.) 90% NTSC (CIE1931) (Typ.) 90% NTSC (CIE1931) (Typ.) **Refresh Rate** 60 Hz 60 Hz 60 Hz **Viewing Angle** 178° (H) / 178° (V) 178° (H) / 178° (V) 178°(H)/178°(V) Power 100 to 240 V, AC, 50/60 Hz 100 to 240 V, AC, 50/60 Hz 100 to 240 VAC, 50/60 Hz **Product Dimensions** 1507 × 930 × 86 mm 1718 × 1046 × 87.5 mm 1963 × 1159 × 87.5 mm

Add product to

compare

Package Dimensions (W × H × D)	1687 × 1061 × 234 mm	1927 × 1212 × 254 mm	2187 × 1366 × 274 mm
Net Weight	40.36 kg	52.25 kg	65.62 kg
Gross Weight	50.69 kg	68.86 kg	86.74 kg
Lifespan	50000 hours	50000 hours	50000h
Video & Audio Input	HDMI IN × 2, MAX 4K @30 Hz, LINE IN × 1	HDMI IN × 2, MAX 4K @30 Hz, LINE IN × 1	HDMI IN × 2, MAX 4K @30 Hz, LINE IN × 1
Video & Audio Output	HDMI OUT (HDMI 2.0) × 1, MAX 4K @60 Hz, LINE OUT × 1	HDMI OUT (HDMI 2.0) × 1, MAX 4K @60 Hz, LINE OUT × 1	HDMI OUT (HDMI 2.0) × 1, MAX 4K @60 Hz, LINE OUT × 1
Control Interface	RS-232 × 1, Touch-USB × 1	RS-232 × 1, Touch-USB × 1	RS-232 × 1, Touch-USB × 1
Network Interface	RJ45 (1000 Mbps port) × 2	RJ45 (1000 Mbps port) × 2	RJ45 (1000 Mbps port) × 2
Data Transmission Interface	USB-C × 1, USB-A × 2 on front pan el, USB-A × 2 on rear panel	USB-C × 1, USB-A × 2 on front pan el, USB-A × 2 on rear panel	USB-C × 1, USB-A × 2 on front pan el, USB-A × 2 on rear panel
Loudspeaker	Built-in 2 × 16 W loudspeaker	Built-in 2 × 16 W loudspeaker	Built-in 2 × 16 W loudspeaker
Bluetooth	Built-in BLE (Bluetooth Low Energ y) module supports Bluetooth 5.0 and previous version	Built-in BLE (Bluetooth Low Energ y) module supports Bluetooth 5.0 and previous version	Built-in BLE (Bluetooth Low Energ y) module supports Bluetooth 5.0 and previous version.
Specification	Omni-directional 6-array layout	Omni-directional 6-array layout	Omni-directional 6-array layout
Mic Function	Echo reduction and smart noise-c ancellation	Echo reduction and smart noise-c ancellation	Echo reduction and smart noise-c ancellation
Voice Distance	8 m	8 m	8 m
Sampling Rate	32 K	32 K	32 K
Mic Sampling Rate	16 bit	16 bit	16 bit
Power Consumption	≤ 320 W (full load)	≤ 370 W (full load)	≤ 490 W (full load)
Standby Consumption	0.5 W	0.5 W	0.5 W
Product Model	DS-D5B65RB/D	DS-D5B75RB/D	DS-D5B86RB/D
Туре	Infrared touch screen	Infrared touch screen	Infrared touch screen
Glass	AG smooth glass	AG smooth glass	AG smooth glass
Touch Point	Max 45 point multi-touch	Max 45 point multi-touch	Max 45 point multi-touch
Touch Response Time	< 10 ms	< 10 ms	< 10 ms
Touch Precision	± 1 mm (≥ 90% touching area)	± 1 mm (≥ 90% touching area)	±1 mm (≥ 90% touching area)
Working Temperature	0 °C to 40 °C (32 °F to 104 °F)	0 °C to 40 °C (32 °F to 104 °F)	0 °C to 40 °C (32 °F to 104 °F)
Working Humidity	10% to 90% RH	10% to 90% RH	10%~90% RH